


Isokern B-Vent (IBV)

36, 46

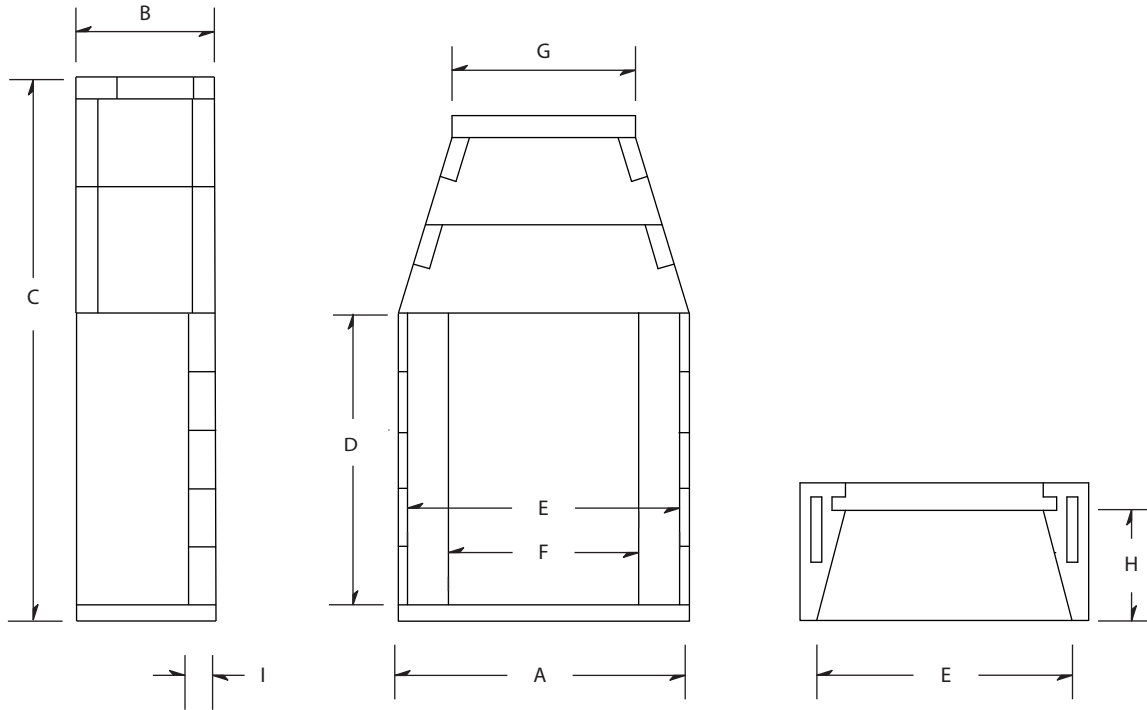

Side View

Front View

Plan View

Model	A	B	C	D	E	F	G	H	I	Minimum Framing	Weight
36"	43"	25 $\frac{1}{4}$ "	71 $\frac{1}{4}$ "	31 $\frac{1}{2}$ "	36 $\frac{1}{8}$ "	27 $\frac{1}{4}$ "	21 $\frac{1}{2}$ "	20 $\frac{1}{4}$ "	5"	44 $\frac{1}{2}$ " W x 73" H x 27" D	1500 lbs.
46"	53"	25 $\frac{1}{4}$ "	71 $\frac{1}{4}$ "	31 $\frac{1}{2}$ "	47 $\frac{1}{8}$ "	37 $\frac{1}{4}$ "	32"	20 $\frac{1}{4}$ "	5"	54 $\frac{1}{2}$ " W x 73" H x 27" D	1700 lbs.
*To achieve height dimension "D" in table above, a 100' (8.3') minimum flue height with 10" I.D. B-Vent is required											
36"	43"	25 $\frac{1}{4}$ "	81 $\frac{3}{4}$ "	*42"	36 $\frac{1}{8}$ "	27 $\frac{1}{4}$ "	21 $\frac{1}{2}$ "	20 $\frac{1}{4}$ "	5"	44 $\frac{1}{2}$ " W x 83 $\frac{1}{4}$ " H x 27" D	1650 lbs.
46"	53"	25 $\frac{1}{4}$ "	81 $\frac{3}{4}$ "	*42"	47 $\frac{1}{8}$ "	37 $\frac{1}{4}$ "	32"	20 $\frac{1}{4}$ "	5"	54 $\frac{1}{2}$ " W x 83 $\frac{1}{4}$ " H x 27" D	1850 lbs.
*To achieve height dimension "D" in table above, a 9' minimum flue height with 10" I.D. B-Vent is required											
36"	43"	25 $\frac{1}{4}$ "	92 $\frac{1}{4}$ "	*52 $\frac{1}{2}$ "	36 $\frac{1}{8}$ "	27 $\frac{1}{4}$ "	21 $\frac{1}{2}$ "	20 $\frac{1}{4}$ "	5"	44 $\frac{1}{2}$ " W x 93 $\frac{1}{2}$ " H x 27" D	1800 lbs.
46"	53"	25 $\frac{1}{4}$ "	92 $\frac{1}{4}$ "	*52 $\frac{1}{2}$ "	47 $\frac{1}{8}$ "	37 $\frac{1}{4}$ "	32"	20 $\frac{1}{4}$ "	5"	54 $\frac{1}{2}$ " W x 93 $\frac{1}{2}$ " H x 27" D	2000 lbs.
*To achieve height dimension "D" in table above, a 12' minimum flue height with 10" I.D. B-Vent is required											